


Peek stemp tip

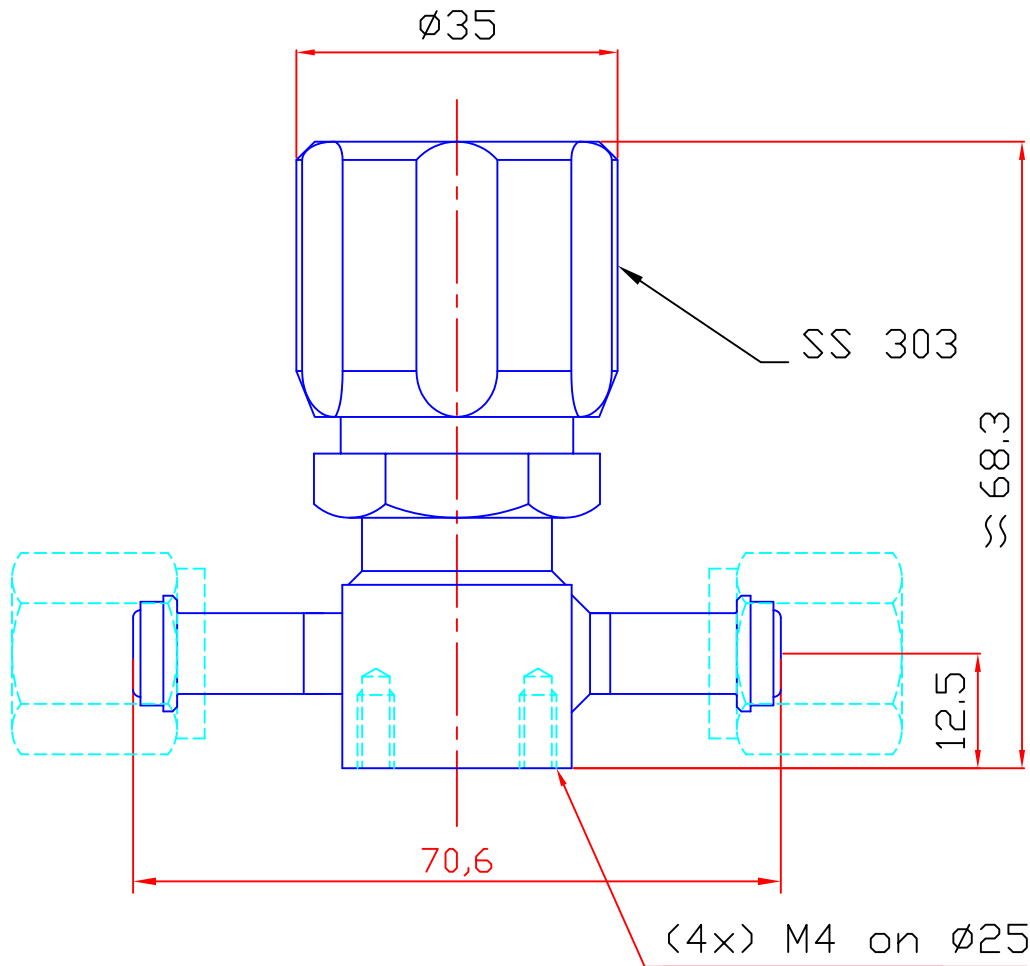

OPERATING FEATURES	
Flow coefficient Cv	0,28
Orifice size (mm)	3,5
Maximum nitrogen flow (nm ³ /h N ₂)	5
External sealing (ATM cm ³ /s Helium)	<2.10 ⁻¹⁰
Internal sealing (ATM cm ³ /s Helium)	<1.10 ⁻⁹
Working temperature (°C)	0 to 250
Working pressure	30
Dead volume for VCR fitting (cm ³)	1,4
Life time (cycles)	50 000

A	06/04/11	DELANNDY.B	Valette.L		Etablissement du plan.	
Indice	Date	Dessiné par	Vérifié par	Visa	Désignation	
Matière			Tol. { Générale Angulaire ± Rugosité Ra		FLOWLINK	
Norme:			Echelle:			
Traitement:					Utilisation et reproduction interdites Sans accord écrit de FLOWLINK Sa	
Titre					Numéro de plan	
VM THT 214 FF					110404	
					Indice	
					A	