



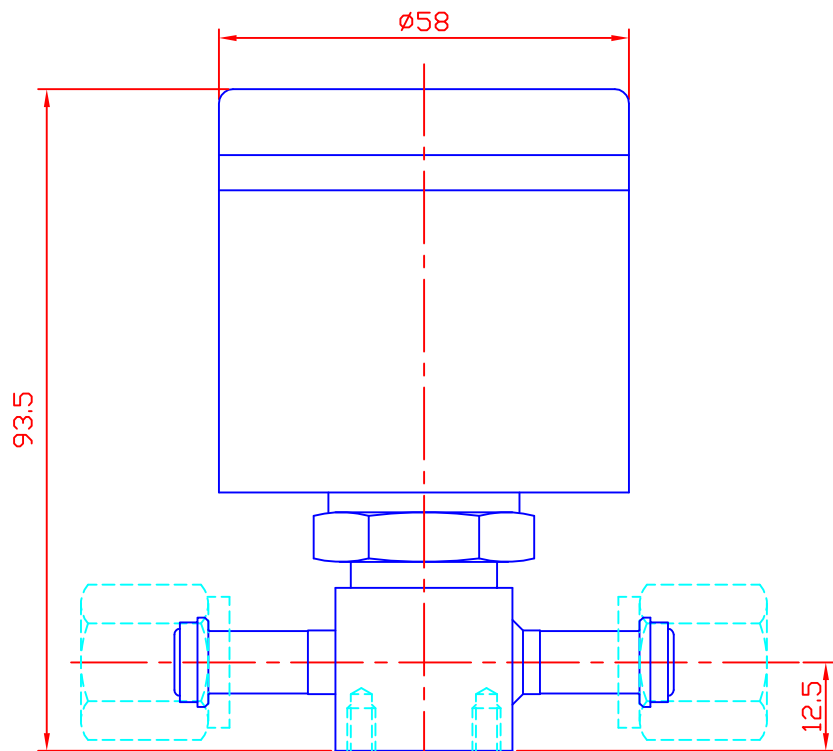

(4x) M4 prof: 6 sur Ø25

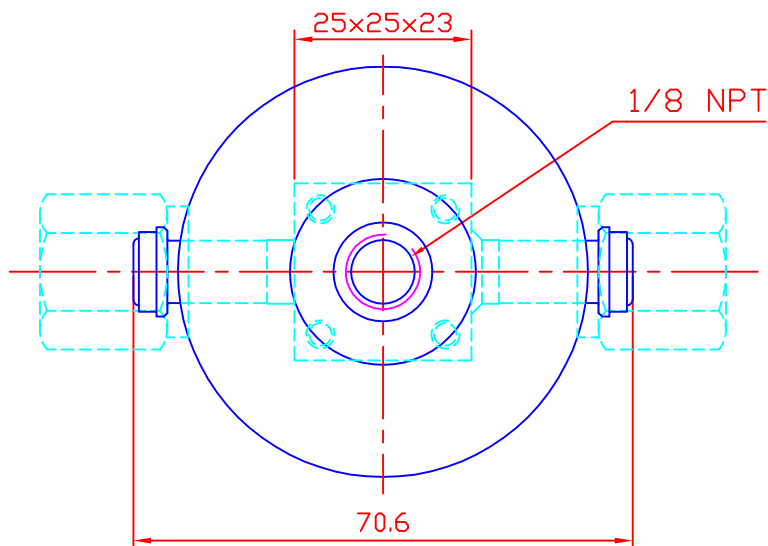

OPERATING FEATURES

Flow coefficient Cv	0,25
Orifice size (mm)	3
Maximum nitrogen flow (nm ³ /h N ₂)	4,5
External sealing (ATM cm ³ /s Helium)	<2.10 ⁻¹⁰
Internal sealing (ATM cm ³ /s Helium)	<1.10 ⁻⁹
Working temperature (°C)	0 to 70
Working pressure (bar)	30
Dead v olume for VCR fitting (cm ³)	1,2
Life time (cycles)	100 000
Actuation pressure	6 bar

A	18/04/11	DELANNOY.B	Valette.L		Etablissement du plan.
Ind	Date	Dessiné par	Vérifié par	Visa	Désignation
Matière				Tol. { Générale 0.2 Angulaire ± Rugosité Ra	FLOWLINK
Norme:					
Traitement:				Echelle:	Utilisation et reproduction interdites Sans accord écrit de FLOWLINK Sa
Titre					
VP 214 FF (30bar)					Numéro de plan 110415
					Indice A