


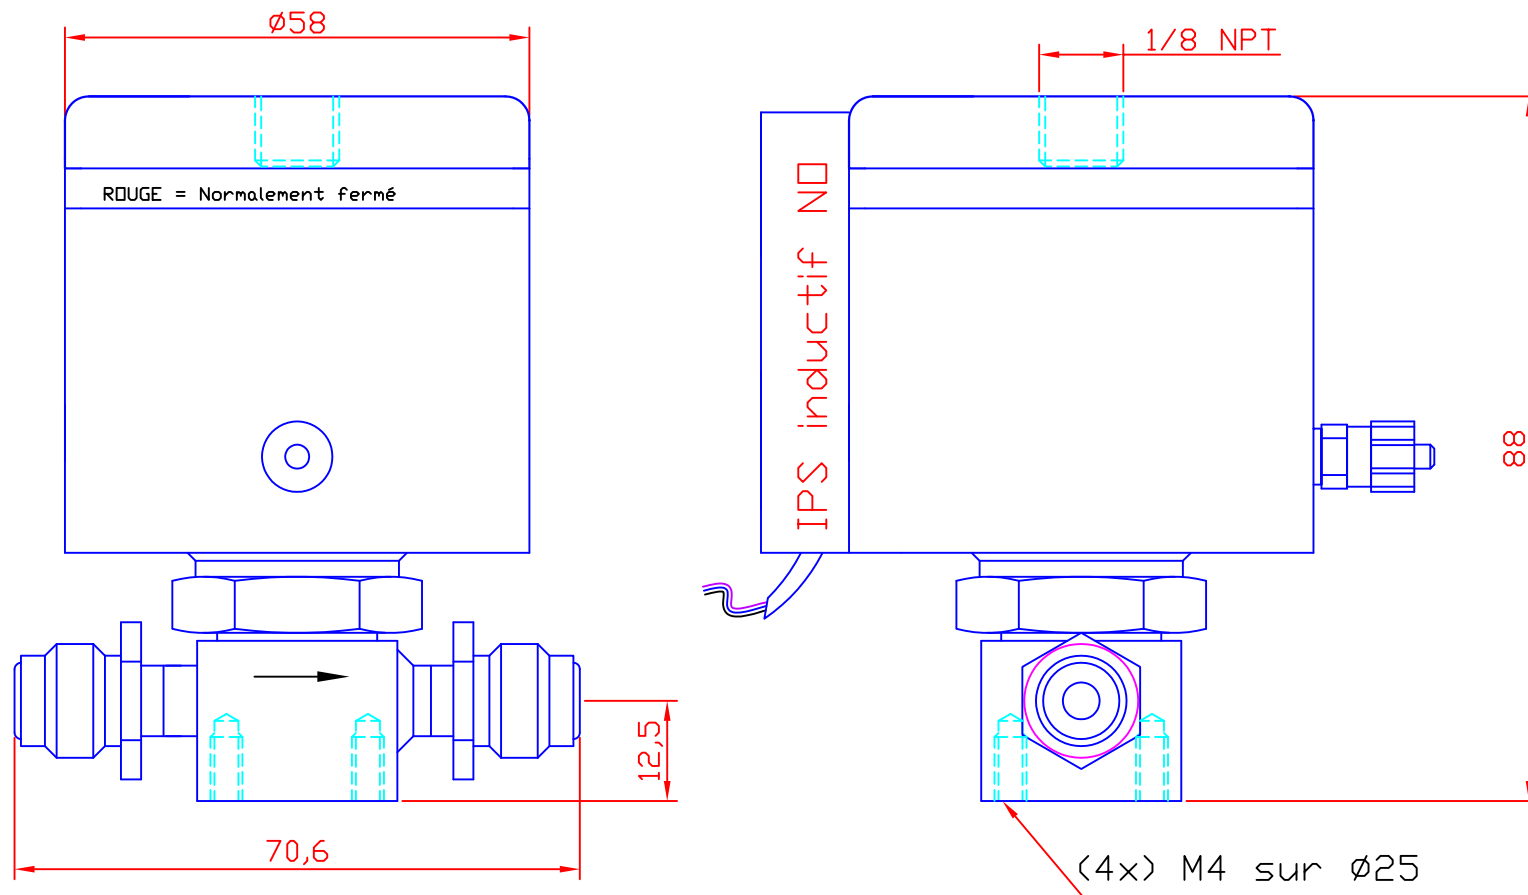

OPERATING FEATURES

Flow coefficient Cv	0,28
Orifice size (mm)	3,5
Maximum nitrogen flow (nm ³ /h N2)	5
External sealing (ATM cm ³ /s Helium)	<2.10 ⁻¹⁰
Internal sealing (ATM cm ³ /s Helium)	<1.10 ⁻⁹
Working temperature (°C)	0 to 70
Working pressure	15
Dead volume for VCR fitting (cm ³)	1,4
Life time (cycles)	1 000 000
Actuation pressure (bar)	5 to 6

A	21/10/11	DELANNOY.B	Valette.L		Etablissement du plan.	
Indice	Date	Dessiné par	Vérifié par	Visa	Désignation	
Matière				Tol. Générale Angulaire ± Rugosité Ra	FLOWLINK	
Norme:						
Traitement:				Echelle: 	Utilisation et reproduction interdites Sans accord écrit de FLOWLINK Sa	
Titre						Número de plan
VP 214 MM NF IPS Inductif NO (Boîtier)					111007	A