
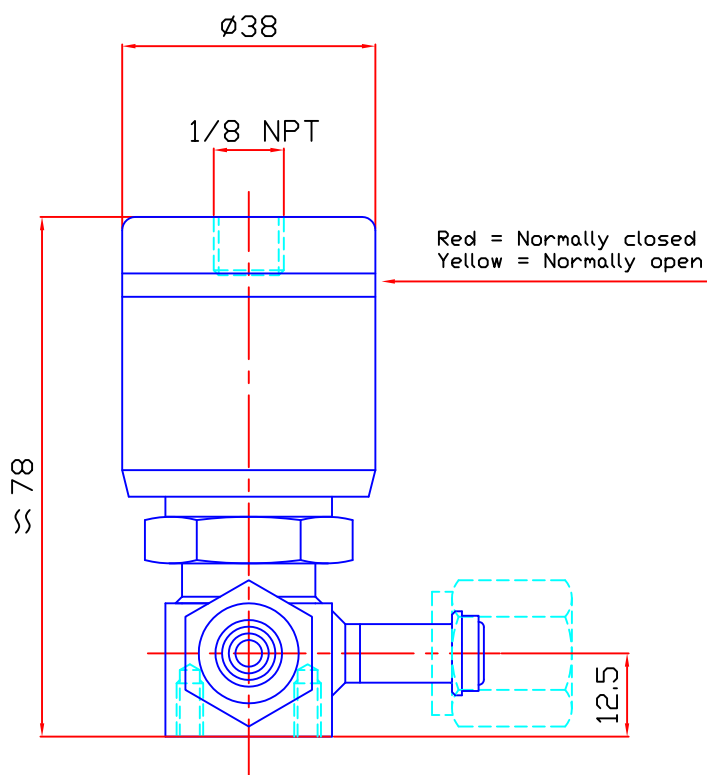


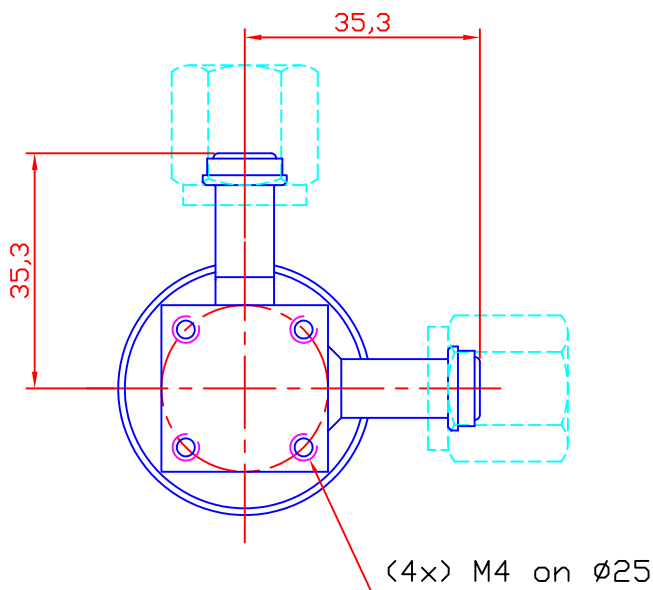

OPERATING FEATURES

Flow coefficient Cv	0,28
Orifice size (mm)	3,5
Maximum nitrogen flow (nm ³ /h N ₂)	5
External sealing (ATM cm ³ /s Helium)	<2.10 ⁻¹⁰
Internal sealing (ATM cm ³ /s Helium)	<1.10 ⁻⁹
Working temperature (°C)	0 to 70
Working pressure (bar)	15
Life time (cycles)	1 000 000
Actuation pressure (bar)	5 to 6

A	08/07/09	DELANNODY.B	Valette.L		Etablissement du plan.
Ind	Date	Dessiné par	Vérifié par	Visa	Désignation
Matière				Tol. Générale Angulaire ± Rugosité Ra	FLOWLINK
Norme:					
Traitement:				Echelle:	Utilisation et reproduction interdites Sans accord écrit de FLOWLINK Sa
Titre					
VP EL 214 M03					Numéro de plan 090708
					Indice A