


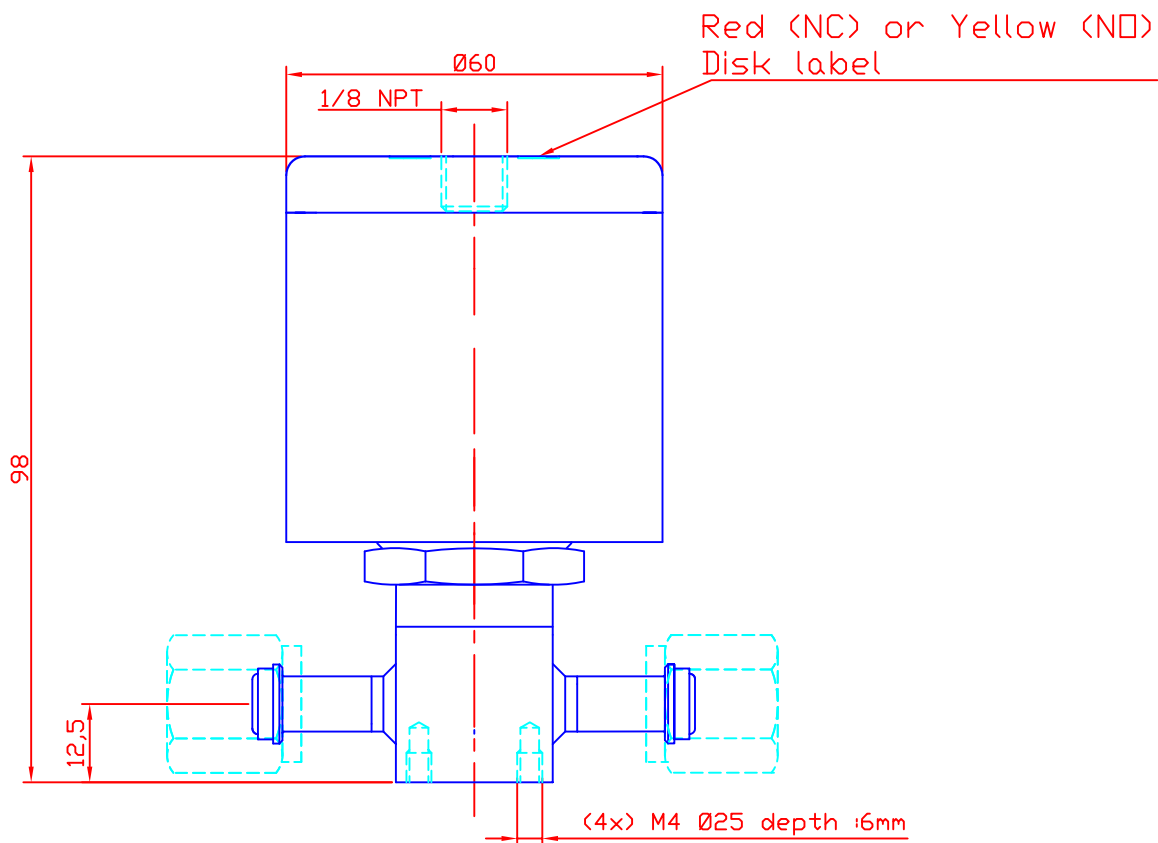

OPERATING FEATURES

Flow coefficient Cv	0,25
Orifice size (mm)	3
Maximum nitrogen flow (nm ³ /h N ₂)	4,5
External sealing (ATM cm ³ /s Helium)	<2.10 ⁻¹⁰
Internal sealing (ATM cm ³ /s Helium)	<1.10 ⁻⁹
Working temperature (°C)	0 to 70
Working pressure (bar)	200
Dead volume for VCR fitting (cm ³)	1,2
Life time (cycles)	100 000
Actuation pressure (bar)	6

A	24/05/11	DELANNOY.B	Valette.L		Etablissement du plan.
Ind	Date	Dessiné par	Vérifié par	Visa	Désignation
Matière					Tol. — Générale 0,4
Norme:					— Angulaire ±
Traitement:					— Rugosité Ra
Titre					Echelle: —
VP HP 214 FF NG					Utilisation et reproduction interdites Sans accord écrit de FLOWLINK Sa
					Número de plan
					110512
					Indice
					A

FLOWLINK