


1. Part Number Description

Valves Up To 4 Ways

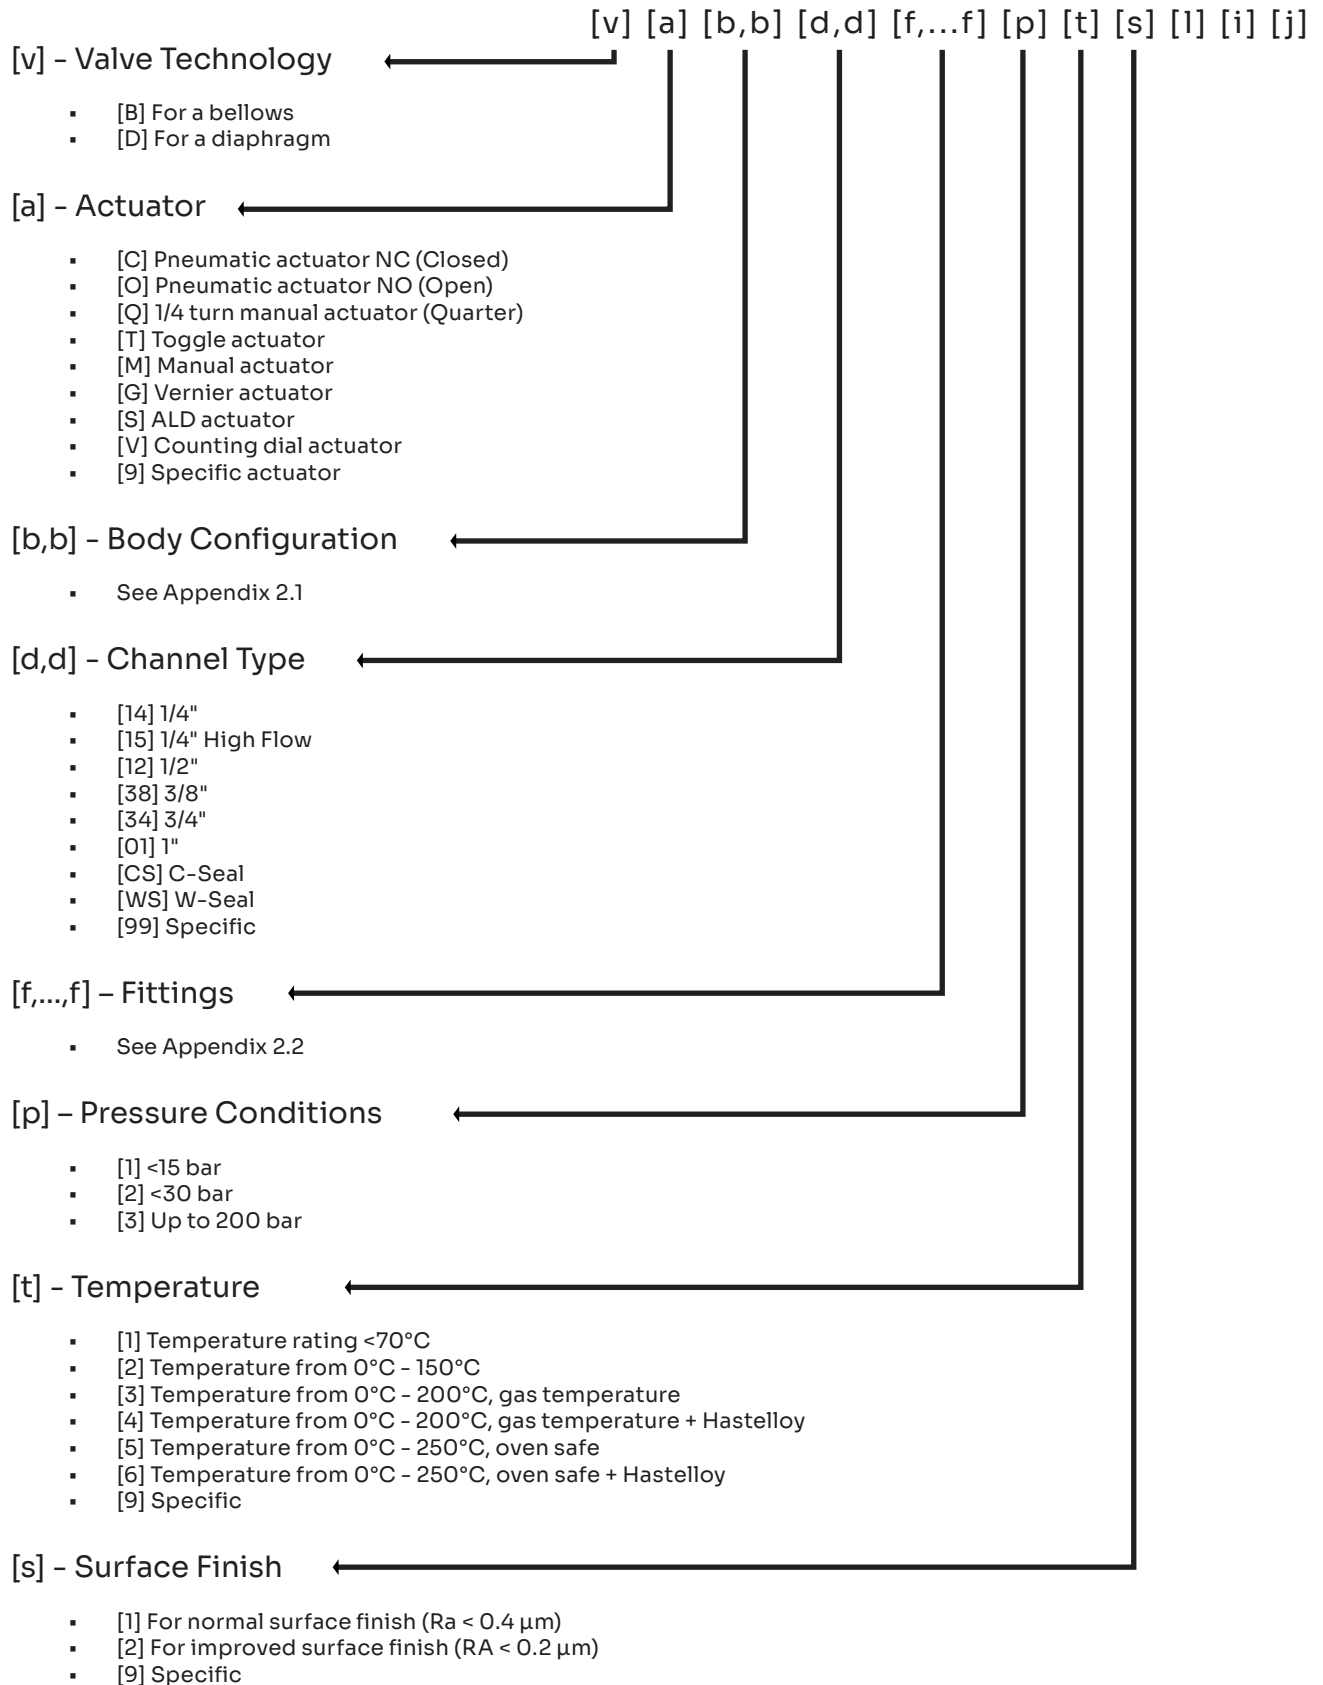

Valves up to 4 ways

[v] [a] [b,b] [d,d] [f,...f] [p] [t] [s] [l] [i] [j]

[l] - Locking

- [1] Unlocked or not applicable
- [2] NO
- [3] NC
- [4] NO & NC

[i] - Position Indicator

- [1] No position or indicator not applicable
- [2] NO position indicator
- [3] NC position indicator
- [4] NO & NC
- [9] Specific

[j] - Pneumatic Fittings

- [A] No fittings or not applicable
- [B] 90° Ø 4 mm fittings
- [C] T-fittings Ø 4 mm
- [D] 90° fittings mini Ø 4 mm
- [E] Mini T-fittings Ø 4 mm
- [F] Straight metal fittings Ø 4 mm
- [G] 90° metal fittings Ø 4 mm
- [H] Metal T-fittings Ø 4 mm
- [I] Straight metal fittings Ø 6 mm
- [J] 90° metal fittings Ø 6 mm
- [K] Metal T-fittings Ø 6 mm
- [L] Straight metal fittings Ø 8 mm
- [M] 90° metal fittings Ø 8 mm
- [N] Metal T-fittings Ø 8 mm
- [9] Specific

2. Appendix

2.1. Body Configuration

www.flowlinksa.com

| N° Config. | Valve Close | Valve Open | Schematic | Fittings configuration for ordering |
|------------|-------------|------------|-----------|-------------------------------------|
| 21 | | | | |
| 22 | | | | |
| 23 | | | | |
| 24 | | | | |
| 31 | | | | |
| 32 | | | | |
| 33 | | | | |
| 34 | | | | |
| 35 | | | | |
| 36 | | | | |
| 41 | | | | |
| 42 | | | | |
| 43 | | | | |
| 44 | | | | |

2.2. Fittings

- [A] 1/4" VCR® female compatible
- [B] 1/4" VCR® male compatible
- [C] 1/2" VCR® female compatible
- [D] 1/2" VCR® male compatible
- [E] 3/4" VCR® male Compatible
- [F] 3/4" VCR® female compatible
- [G] Swagelok® 6 mm compatible
- [H] Swagelok® 1/4" compatible
- [I] Swagelok® 8 mm compatible
- [J] Swagelok® 3/8" compatible
- [K] Swagelok® 10 mm compatible
- [L] Swagelok® 12 mm compatible
- [M] Swagelok® 1/2" compatible
- [N] Swagelok® 3/4" compatible
- [O] Swagelok® 1" compatible
- [P] Welded flange CF16
- [Q] Welded flange CF40
- [R] Welded flange KF16
- [S] Welded flange KF40
- [T] 3/8" VCR® female compatible
- [U] 3/8" VCR® male compatible
- [V] Welded flange CF10
- [W] Welded flange KF10
- [X] 1" VCR® female compatible
- [Y] 1" VCR® male compatible
- [Z] Welded flange KF25
- [1] 1,125" surface mounting
- [2] 1,5" surface mounting
- [9] Specific